

# evolution



[www.evolutionfasteners.co.uk](http://www.evolutionfasteners.co.uk)

E-mail: [sales@evolutionfasteners.co.uk](mailto:sales@evolutionfasteners.co.uk)

Tel: +44 (0)141 647 7100

Fax: +44 (0)141 647 5100

## evolution quality

We take premium quality very seriously at Evolution and our ISO 9001 certification demonstrates this. We are dedicated to ensuring quality in everything we do, from products to Customer Services and Marketing Support.

We are committed to ensuring the quality of our products at every stage in the production process. From initial product design, to prototype testing, through manufacturing to final testing and distribution of approved fasteners. We believe in the quality of our products but don't just take our word for it!

**If you would like some samples to try them for yourself, call or e-mail us.**

## evolution technical support



Product technical and performance information is available in our product datasheets which are downloadable from the Tech Support area of our website [www.evolutionfasteners.co.uk](http://www.evolutionfasteners.co.uk)

The qualified engineers in our in-house Technical Department are available to:

- provide technical advice and calculations
- carry out in-situ testing to support our products
- discuss your requirements for individual projects
- design and manufacture bespoke fasteners

For further technical information or specific queries about the use of our products, please call us and ask for our Technical Department or e-mail [technical@evolutionfasteners.co.uk](mailto:technical@evolutionfasteners.co.uk)

# evolution

[www.evolutionfasteners.co.uk](http://www.evolutionfasteners.co.uk)

Copyright © 2011 Evolution Fasteners (UK) Ltd. All rights reserved.

## guide to evolution collated flooring screws

# exclusive to evolution

## PAM flooring system

The PAM Professional Autofeed Screw System is a contractor-tough, reliable, easy to use, and versatile system that will help increase productivity, improve quality and reduce expensive callbacks.

The system exclusively available in the UK from Evolution consists of:



PAM Collated Flooring Screws

+



PAM Collated Flooring Adaptor



110v Makita FS2500 Motor

### designed for:

fixing sheet flooring materials to timber.



**PAM Drive**



### key product features:


- Split threadform design prevents 'jacking' of the material being fixed down.
- Unique **PAM Drive** modified torx drive ensures low bit wear and eliminates wobble.
- Collation consistency and quality eliminates jamming.
- Sharp single thread design specifically for chipboard flooring.
- Manufactured in steel with yellow zinc passivated coating.

### range information:

Product Code	Description	Size	Box Qty	Carton Qty
P-SFC51E	Collated Sub-Flooring Screw	4.2 x 51mm	100	6,000
P-SFC64E	Collated Sub-Flooring Screw	4.2 x 64mm	100	6,000
P-SFC75E	Collated Sub-Flooring Screw	4.8 x 75mm	100	6,000
CFT110	110v Collated Flooring Tool (PAM flooring adaptor with Makita FS2500)			

# evolution

## square drive collated flooring screws

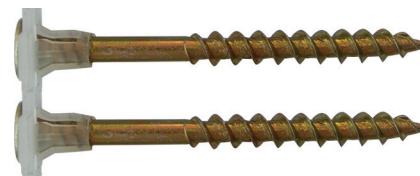

### designed for:

fixing flooring materials to timber.


### key product features:

- Split' threadform design prevents 'jacking' of the material being fixed down.
- Self-countersinking nibs under the head of the screw ensure a flush finish.
- Collation consistency and quality eliminates jamming.
- Manufactured in steel with yellow zinc passivated coating.

Product Code	Size	Box Qty	Carton Qty	Fixture Thickness
CFSCYS45	4.2 x 45mm	100	10,000	12mm
CFSCYS55	4.2 x 55mm	100	10,000	20mm

# evolution

## rigid collated flooring screws



### designed for:

use in sub-flooring applications and other high volume, new build applications e.g. sheathing, stair treads and wall or sole plates

### key product features:

- Rigid collation strip is quick to load into tools (suitable for use with Quik Drive® auto-feed tools).
- Self-countersinking nibs under the head of the screw ensure a flush finish.
- Super sharp point and twin threadform for rapid advancement in timber
- Manufactured in steel with yellow zinc passivated coating.

Product Code	Size	Carton Qty
SFC51E	4.2 x 51mm	2,000
SFC63E	4.2 x 64mm	1,500