


product datasheet

bugle head self-drill drywall screw

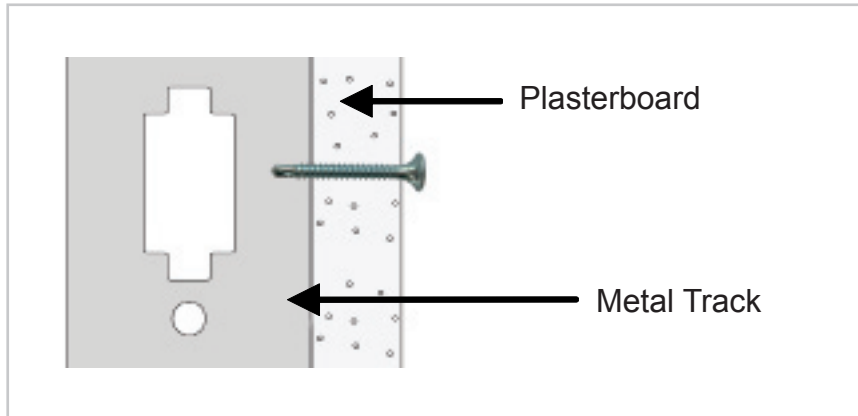

Evolution Fasteners (UK) Ltd
Unit 4, Block 16
Clydesmill Road
Clydesmill Industrial Estate
Glasgow
G32 8RE

Tel: +44(0)141 646 0055

Fax: +44(0)141 646 0033

technical@evolutionfasteners.co.uk

Designed for:	Fixing plasterboard to heavier gauge metal section (up to 2.5mm).
Head Style:	Bugle
Drive Bit:	Phillips 2
Drill point:	Self-drill point
Thread Form:	Twin
Coating:	Electroplated zinc
Shank Material:	Carbon steel
Material Grade:	AISI C1022
Effective Thread Length:	Fully threaded
Recommended Drill Speed:	2,000 - 3,000 RPM
Steel Thickness:	0.8mm - 2.5mm
Drilling Capacity:	0.8mm - 2.5mm

Bugle Head Self-drill Drywall Range

Product Code	Size	Box Qty	Carton Qty	Fixture Thickness
DWSDZ25	3.5mm x 25mm	1,000	10,000	12mm
DWSDZ32	3.5mm x 32mm	1,000	10,000	15mm
DWSDZ38	3.5mm x 38mm	1,000	10,000	20mm
DWSDZ42	3.5mm x 42mm	1,000	10,000	25mm
DWSDZ50	3.5mm x 50mm	1,000	10,000	35mm
DWSDZ65	3.5mm x 65mm	500	5,000	50mm
DWSDZP75	3.5mm x 75mm	500	5,000	60mm
DWSDZ100	3.5mm x 100mm	500	3,000	85mm
DWSDZ125	3.5mm x 125mm	250	2,500	110mm

Ask for Evolution



Drywall Screws



Tek Screws




Collated Screws



Masonry Screws



Anchors



Clips & Brackets