




product datasheet

gash point tek screw

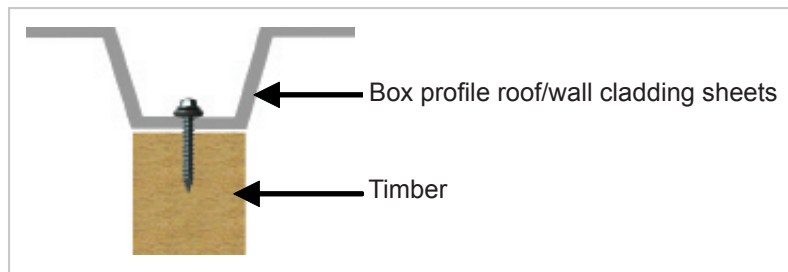

Evolution Fasteners (UK) Ltd
 Unit 4, Block 16
 Clydesmill Road
 Clydesmill Industrial Estate
 Glasgow
 G32 8RE
 Tel: +44(0)141 646 0055
 Fax: +44(0)141 646 0033
 technical@evolutionfasteners.co.uk

Designed for:	Fixing profile metal sheets to timber purlins.
Head Style:	Hexagonal
Drive Bit:	5/16" Hexagonal
Drill Point:	Gash point
Thread Form:	Twin
Coating:	500hr silver Ruspert® (Please ask for our Ruspert® datasheet for more information.)
Shank Material:	Carbon steel
Material Grade:	AISI C1022
Effective Thread Length:	Fully threaded
Recommended Drill Speed:	1,500 - 2,500 RPM
Drilling Capacity:	0.5mm - 1.2mm
Steel Thickness:	0.5mm - 1.5mm

Gash Point Tek Screw Range				
Product Code	Size	Box Qty	Carton Qty	Washer
TSBW6.3-25-GP	6.3 x 25mm	200	4,800	16mm Ø bonded EPDM washer
TSBW6.3-32-GP	6.3 x 32mm	200	4,800	16mm Ø bonded EPDM washer
TSBW6.3-45-GP	6.3 x 45mm	200	4,800	16mm Ø bonded EPDM washer
TSBW6.3-60-GP	6.3 x 60mm	100	2,400	16mm Ø bonded EPDM washer
TSBW6.3-80-GP	6.3 x 80mm	100	2,400	16mm Ø bonded EPDM washer
TSBW6.3-100-GP	6.3 x 100mm	100	2,400	16mm Ø bonded EPDM washer
TSBW19-6.3-32-GP	6.3 x 32mm	200	2,400	19mm Ø bonded EPDM washer
TSBW19-6.3-45-GP	6.3 x 45mm	200	1,800	19mm Ø bonded EPDM washer

Ultimate Mechanical Performance		
Diameter	Tensile Strength	Shear Strength
6.3mm	18.5kN	11.8kN

Ask for Evolution



Drywall Screws



Tek Screws



Collated Screws



Masonry Screws



Anchors



Clips & Brackets