


# product datasheet

## fine thread drywall screws (zinc)



www.evolutionfasteners.co.uk

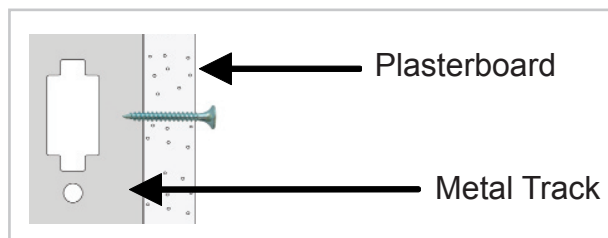

Evolution Fasteners (UK) Ltd  
 Unit 4, Block 16  
 Clydesmill Road  
 Clydesmill Industrial Estate  
 Glasgow  
 G32 8RE  
 Tel: +44(0)141 646 0055  
 Fax: +44(0)141 646 0033  
 technical@evolutionfasteners.co.uk

<b>Designed for:</b>	Fixing plasterboard to metal studs of up to 1mm.
<b>Head Style:</b>	Bugle
<b>Drive Bit:</b>	Phillips 2
<b>Drill Point:</b>	Super sharp point
<b>Thread Form:</b>	Single thread, fine
<b>Coating:</b>	Electro plated zinc
<b>Shank Material:</b>	Carbon steel
<b>Material Grade:</b>	AISI C1022
<b>Effective Thread Length:</b>	Fully threaded
<b>Recommended Drill Speed:</b>	4,000 - 6,000 RPM
<b>Steel Thickness:</b>	0.5mm - 1.0mm

### Fine Zinc Drywall Range

Product Code	Size	Box Qty	Carton Qty	Fixture Thickness
DWSZ25	3.5mm x 25mm	1,000	10,000	15mm
DWSZ32	3.5mm x 32mm	1,000	10,000	22mm
DWSZ38	3.5mm x 38mm	1,000	10,000	28mm
DWSZ42	3.5mm x 42mm	1,000	10,000	32mm
DWSZ50	3.5mm x 50mm	1,000	10,000	40mm
DWSZ65	3.5mm x 65mm	500	5,000	55mm
DWSZ75	3.5mm x 75mm	500	5,000	65mm
DWSZ90	3.5mm x 90mm	500	3,000	80mm
DWSZ100	3.5mm x 100mm	500	3,000	90mm
DWSZ125	3.5mm x 125mm	250	2,500	115mm
DWSZ150	3.5mm x 150mm	200	2,000	140mm

### Ultimate Mechanical Performance

Diameter	Tensile Strength	Shear Strength	Torque
3.5mm	1.4kN	0.8kN	2.7Nm

### Hardness Ratings (Vickers)

Diameter	Surface Hardness
3.5mm	550HV

Ask for Evolution



Drywall Screws



Tek Screws



Collated Screws



Masonry Screws



Anchors



Clips & Brackets