


product datasheet

collated self-drilling drywall screw



www.evolutionfasteners.co.uk

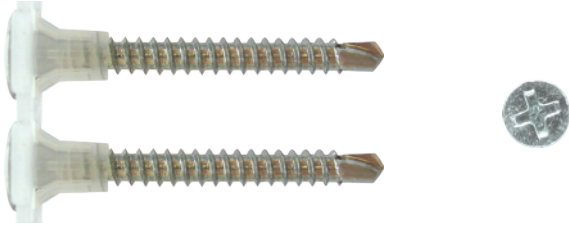

Designed for:	Fixing plasterboard to heavier guage drywall track (up to 2.5mm).
Head Style:	Bugle
Drive Bit:	Phillips 2
Drill point:	Tek 1
Thread Form:	Single thread, fine
Coating:	Electroplated zinc
Shank Material:	Carbon steel
Material Grade:	AISI C1022
Fire Tested:	Yes, to EN-1364-1 (ask for details of our fire test results for more information)
Effective Thread Length:	Fully threaded
Recommended Drill Speed:	3,000 - 4,000 RPM
Steel Thickness:	0.8mm - 2.5mm

Evolution Fasteners (UK) Ltd
 Unit 4, Block 16
 Clydesmill Road
 Clydesmill Industrial Estate
 Glasgow
 G32 8RE
 Tel: +44(0)141 646 0055
 Fax: +44(0)141 646 0033
 technical@evolutionfasteners.co.uk

Collated Self-drilling Drywall Range				
Product Code	Size	Box Qty	Carton Qty	Fixture Thickness
CDWFZ25	3.5mm x 25mm	1,000	10,000	12mm
CDWFZ35	3.5mm x 35mm	1,000	10,000	20mm
CDWFZ45	3.5mm x 45mm	1,000	10,000	30mm
CDWFZ50	3.5mm x 50mm	1,000	10,000	35mm

Ask for Evolution



Drywall Screws



Tek Screws




Collated Screws



Masonry Screws



Anchors



Clips & Brackets